

Specifications


SMART Response™ PE

interactive response system

Receiver and clicker

Physical specifications

Receiver size	4 3/4" W × 7/8" H × 2 1/4" D (12 cm × 2.2 cm × 5.7 cm)
Receiver weight	5 3/4 oz. (165 g)
Clicker size	2 1/4" W × 5 5/8" H × 1 1/8" D (5.7 cm × 14.2 cm × 2.8 cm)
Clicker weight	7 1/4 oz. (200 g) without batteries
Shipping size	22 5/8" W × 7 3/4" H × 13 5/8" D (57.5 cm × 19.8 cm × 34.5 cm)
Shipping weight	SRP-PE-24 – 12 lb. (5.4 kg) SRP-PE-32 – 14 lb. (6.4 kg)

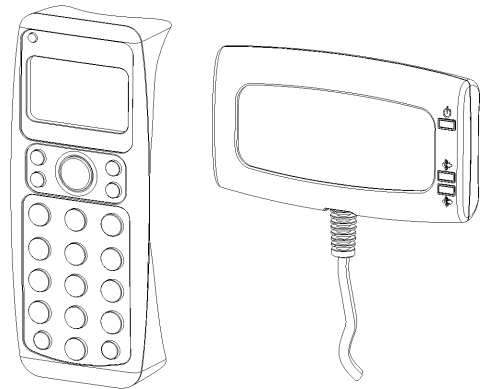

Standard Features

Software	SMART Response™ 2011 assessment software, including SMART Notebook™ collaborative learning software 10, for Windows® and Mac computers is included on the DVD. Software upgrades are available at smarttech.com/downloads .
Technology	IEEE 802.15.4 wireless
Radio frequency	2400 MHz to 2483.5 MHz ISM band
Capacity	Supports up to 60 clickers with model 1.1.3 receiver

SPECIFICATIONS

SMART Response PE interactive response system – Receiver and clicker

SMART Response software computer requirements

Windows operating systems

- Pentium® 4 processor or better
- 512 MB of RAM (1 GB recommended)
- Free hard disk space:

Software	Space required
SMART Notebook software	277 MB
Gallery Essentials	549 MB
Lesson Activity Toolkit	111 MB
SMART Product Drivers	145 MB
SMART Response assessment software	47 MB
SMART Sync™ Teacher software	37 MB
Common platform	62 MB
Total	1228 MB

- Windows XP SP3, Windows Vista® SP2 or Windows 7 operating system
- Internet Explorer® Internet browser 6.0 or later
- Adobe® Flash® Player 10 Firefox® plug-in
- Adobe Flash Player 10 ActiveX® control for SMART Notebook software
- Adobe Reader® 8.0 or later
- Microsoft® DirectX® technology 8.1 or later (required for SMART Video Player)

Mac operating system software

- 1.5 GHz Intel® processor or better
- 1 GB of RAM

SPECIFICATIONS

SMART Response PE interactive response system – Receiver and clicker

- Free hard disk space:

Software	Space required
SMART Notebook software	163 MB
Gallery Essentials	499 MB
Lesson Activity Toolkit	70 MB
SMART Product Drivers	203 MB
SMART Response assessment software	65 MB
SMART Sync Teacher software	25 MB
Common platform	257 MB
Total	1282 MB

- Mac OS X 10.5.8 or later operating system software
- Adobe Reader® 8.0 or later
- Safari application program 4.0.2 or later
- Adobe Flash Player 10 or later

NOTES

- 1 MB = 1024² bytes, 1 GB = 1024³ bytes.
- SMART Response assessment software runs on 32-bit and 64-bit operating systems.

Receiver features

Transmit power	0 dBm with a typical range of 100' (30 m)
Antenna	Integrated antenna
Host interface	USB 2.0 full-speed (12 Mbps) with a 6' (1.8 m) captive cable
LED indicators	Red and green LED indicate power, transmit data, receive data and link status.
Configuration	Plug and play (SMART Response software required)

Clicker features

Transmit power	0 dBm with a typical range of 100' (30 m)
Antenna	Integrated antenna
LCD display	1 5/8" W × 1" H (41.6 mm × 24.6 mm), 100° viewing angle and a contrast ratio of 5:1

SPECIFICATIONS

SMART Response PE interactive response system – Receiver and clicker

Key pad	Alphanumeric (A–J, 0–9 and texting A–Z), True (T)/Yes (Y)/Back, False (F)/No (N)/Forward, Question (?), +/-/Shift, Fraction/Decimal/Space, Up/Down, Delete, Menu and Power buttons
Configuration	Plug and play (no additional software required)
Batteries	2 × AA alkaline
Regulatory certification	IC (Industry Canada), C-Tick, CE, FCC, SRRC (Pending), NOM (Pending)
Environmental compliance	EU WEEE, RoHS (Europe), US CPSIA, US Packaging, China EIP
Warranty	Two-year limited equipment warranty

Storage and operating specifications

Operating temperature	41°F to 95°F (5°C to 35°C)
Operating humidity	5% to 85% relative humidity (non-condensing)
Storage temperature	-40°F to 131°F (-40°C to 55°C)
Storage humidity	5% to 90% relative humidity (non-condensing)

SMART order numbers

SRP-PE-24	Includes 1 receiver, 24 clickers, carrying case for 40 clickers, Phillips No. 1 screwdriver, 48 AA batteries, quick start guide and software DVD
SRP-PE-32	Includes 1 receiver, 32 clickers, carrying case for 40 clickers, Phillips No. 1 screwdriver, 64 AA batteries, quick start guide and software DVD


Optional accessories

SRP-PE-RMT-1	Includes 1 clicker and 2 AA batteries
SRP-PE-RMT-5	Includes 5 clickers and 10 AA batteries
SRP-PE-RCV-1	Includes a receiver and software DVD
SRP-PE-CC	Carrying case for 1 receiver and 40 clickers

SPECIFICATIONS

SMART Response PE interactive response system – Receiver and clicker

Physical dimensions

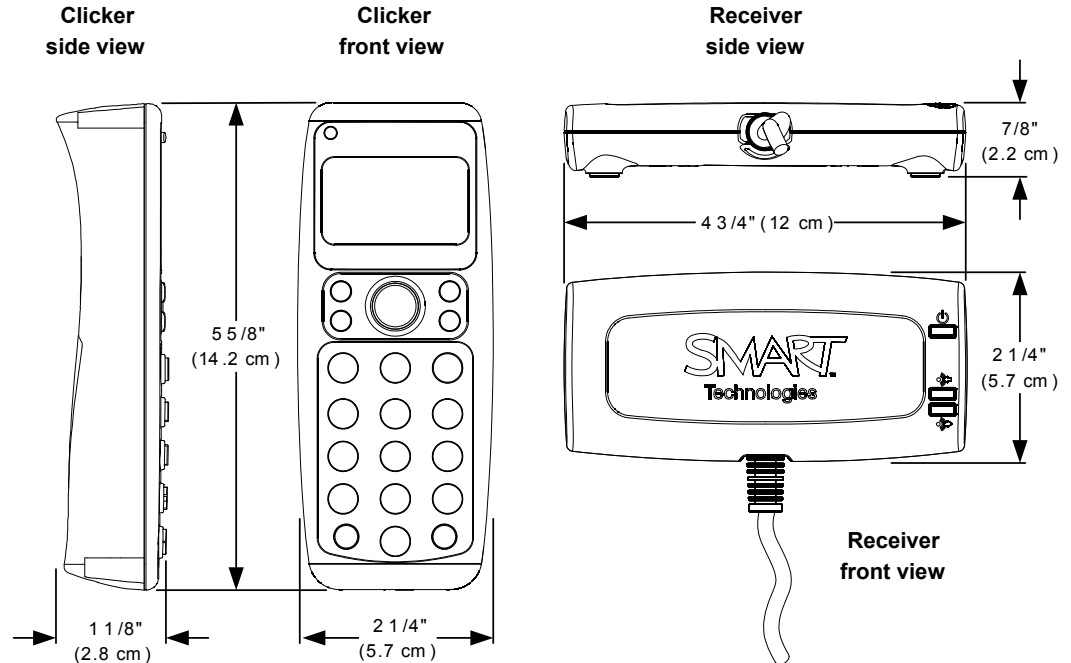

©2007–2011 SMART Technologies ULC. All rights reserved. SMART Response, SMART Notebook, SMART Sync, the SMART logo and smarttech are trademarks or registered trademarks of SMART Technologies ULC in the U.S. and/or other countries. Microsoft, Windows, Windows Vista, Internet Explorer, ActiveX and DirectX are either registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. Mac, MacOS and Safari are trademarks of Apple Inc., registered in the U.S. and other countries. Adobe, Reader and Flash are either registered trademarks or trademarks of Adobe Systems Incorporated in the U.S. and/or other countries. All other third-party product and company names may be trademarks of their respective owners. One or more of the following patents: US6320597; US6326954; US6741267; US7151533; US7757001; USD612396; USD616462; USD617332; and USD636784. Other patents pending. Contents are subject to change without notice. 07/2011